



ETTLIN LUX®

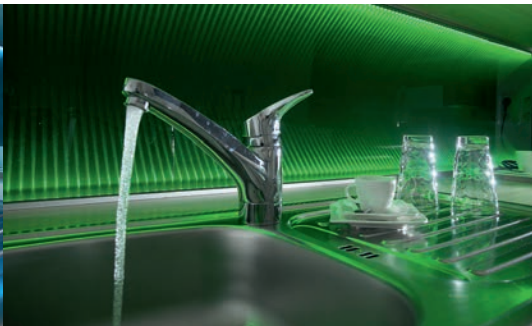

ettlinlux.com.au

Splashbacks with ETTLIN LUX® | Smat Glas

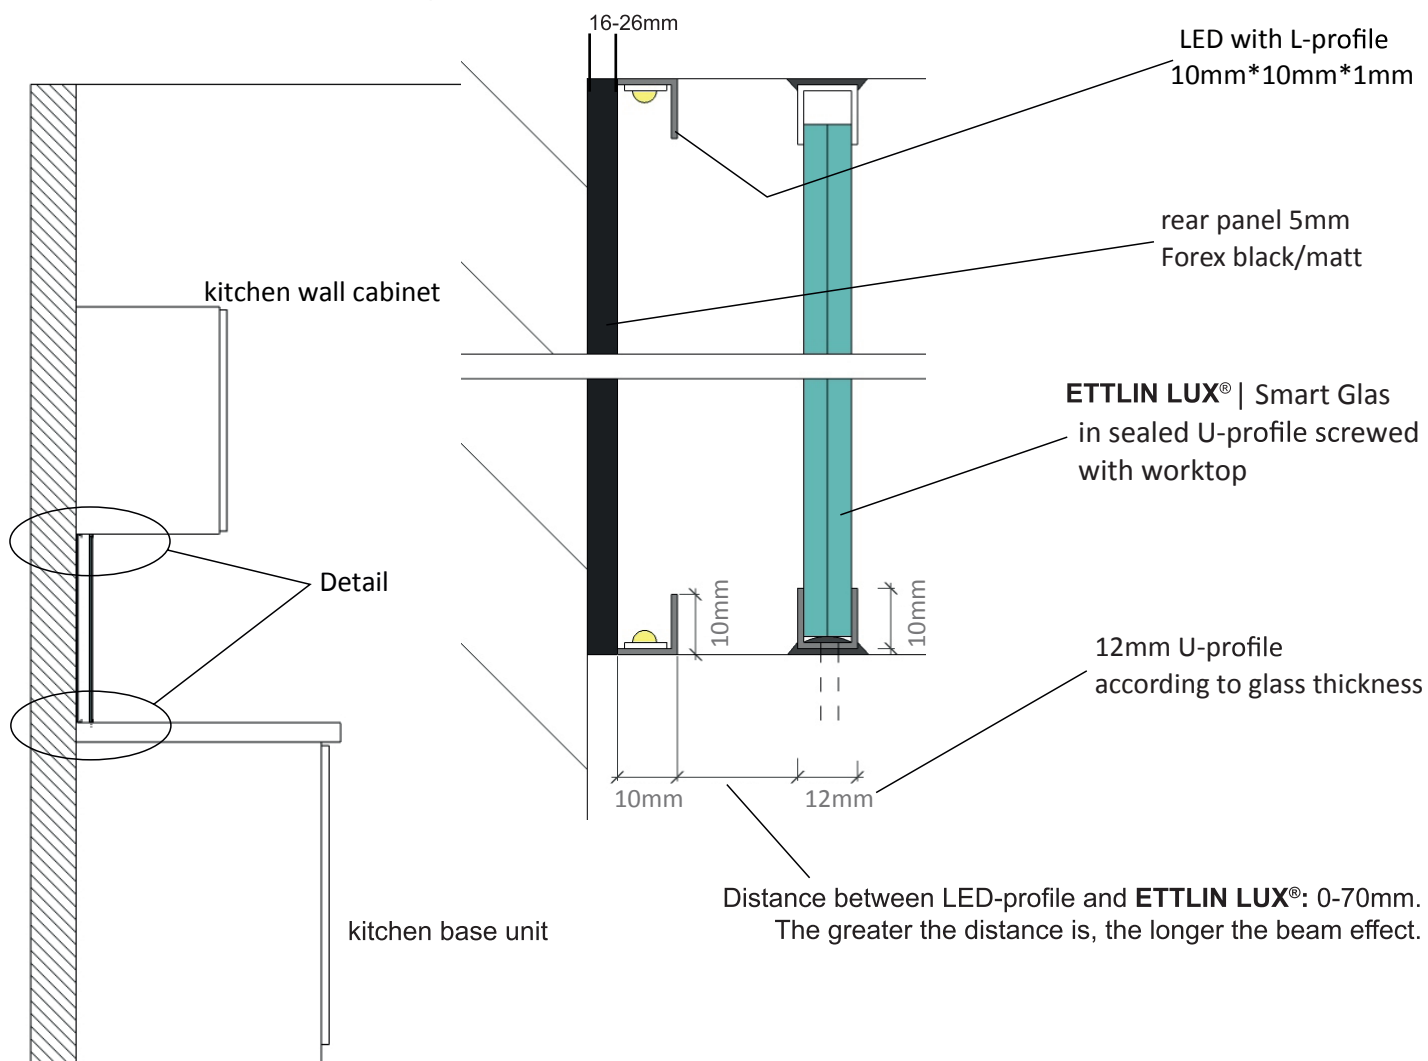

Defined space of the complete installation: 24mm; smallest possible mounting space.

Light Requirements for LED strip used in ETTLIN LUX® kitchen splashback:

- LED RGB flex stripe, covered black.
- Operating voltage: 12V DC.
- Pitch 15mm (distance between the LEDs).
- Divisible every 5cm -> 3 pieces per item.
- Rated power: 14,4 W/m.
- Protection class: IP 20.
- Angle of radiation: 120°.
- Wave length: 450-630nm.
- LED Type SMD 5050.

Proudly distributed by:

AUSTARON
SURFACES

www.austaron.com.au
Ph: 02 9822 7055

dynamic splashbacks with
ETT LIN LUX®